


Nylon-Insulated Single Crimp Lipped Blade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	105°C		

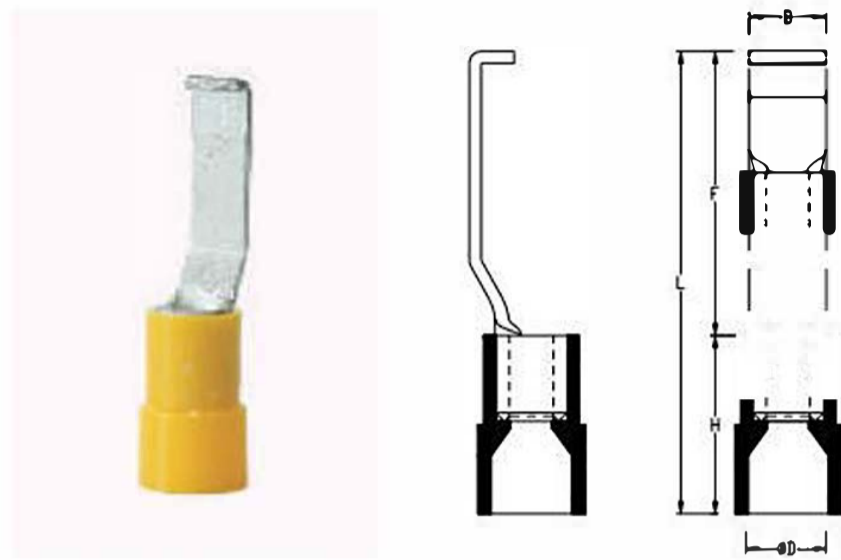

Insulated Single Crimp Terminals

Wire Range	SKU#	MFG#	Dimension(mm)									Color	Tool	pcs/pack
			B		L		F		H	D	T			
A.W.G. 22-16 0.5~1.5mm²	KFSN610	LBNY1.25-3	0.098	2.5	0.807	20.5	0.394	10.0	0.413 (10.5)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSN611	LBNY1.25-4.6	0.079	2.0	1.122	28.5	0.709	18.0						1000
A.W.G. 16-14 1.5~2.5mm²	KFSN620	LBNY2-3	0.118	3.0	0.807	20.5	0.394	10.0	0.413 (10.5)	0.157 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSN621	LBNY2-4.6	0.079	2.0	1.122	28.5	0.709	18.0						1000
A.W.G. 12-10 4~6mm²	KFSN630	LBNY5.5-3	0.118	3.0	0.925	23.5	0.394	10.0	0.531 (13.5)	0.276 (7.0)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSN631	LBNY5.5-4.6	0.177	4.5	1.24	31.5	0.709	18.0						500